


DATA SHEET

INOF215

21.5" OPEN FRAME TOUCH SCREEN

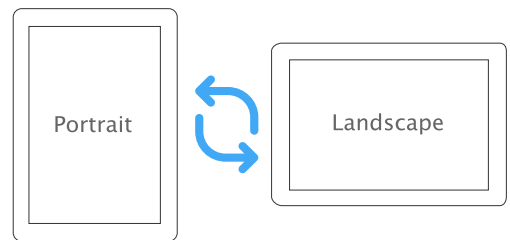

The INOF215 is a rugged, 21.5" open frame touch screen, that has been designed to ensure reliable operation in most industrial and public environments.



With rear flush-mounting options, a sealed front and toughened scratch resistant glass, it is ideally suited for use in public kiosks, factories, workshops, mine sites and other situations requiring robust protection against the hazards of an industrial or public environment.

INDUSTRIAL DESIGN BUILT FOR TOUCH

- Achieve a flush finish for tidy integration
- Manufactured specifically as a touch screen with toughened glass and rugged design
- Front sealed for water and dust resistance enabling easy cleaning and care

HIGH IMAGE QUALITY

- 1920 x 1080 Full HD resolution with crisp, clear image representation and pure glass front
- Balanced edge-to-display distance for perfect appearance in portrait or landscape

TRUE MULTI-TOUCH TECHNOLOGY

- 21.5" commercial-grade touch screen
- Projected capacitive (PCAP) 10-point multi-touch
- 1920 x 1080 (16:9) resolution
- Recessed lip to easily achieve a flush finish.
- Front sealed with water, dust and scratch resistance for easy care
- High clarity display with protective toughened glass
- Windows 10 compatible, driver free, plug-and-play
- Supports multi-touch gestures including pan, pinch & zoom
- Designed with commercial-grade, long-life components for extended 24*7 use
- 3 year warranty and support



LOCALLY SUPPORTED




3-YEAR WARRANTY



10 POINT MULTI-TOUCH



EASY SET UP


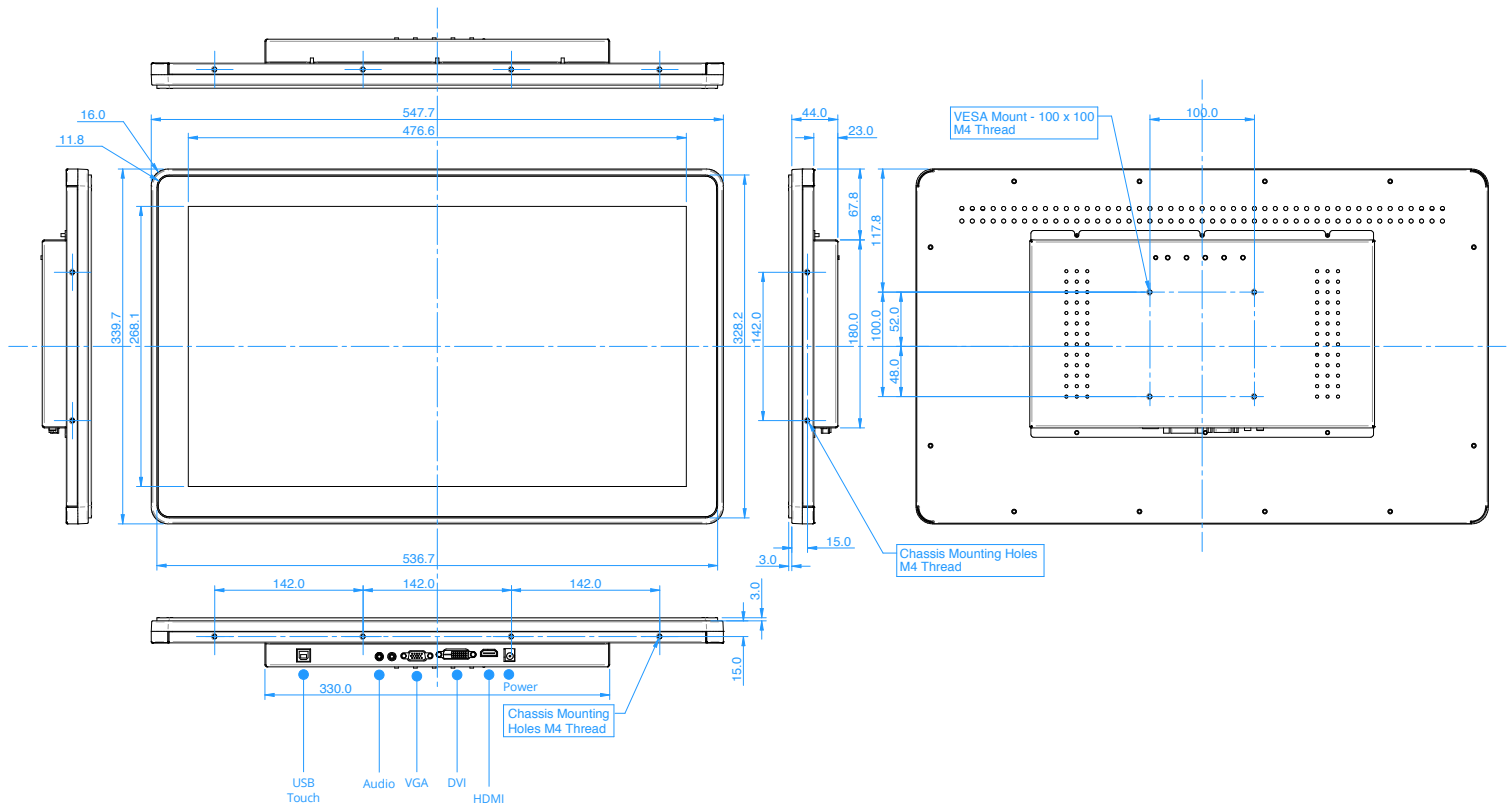


Commercial Grade

- Designed and built with commercial grade, long-life components for quality, extended 24/7 reliability and a reduced Total Cost of Ownership (TCO)
- 3 years warranty and local Australian support

Technical Specifications

- 1920 x 1080 Full HD resolution
- 5ms response time
- 250cd/m2 brightness
- 1,000:1 contrast ratio
- VGA, DVI & HDMI inputs
- 85/85 degree wide viewing angle
- Easy mounting in kiosk/joinery
- 21.5" diagonal 16:9 ratio
- Energy saving LED technology
- 10-point PCAP multi-touch
- Multi-touch with gesture support
- USB touch interface
- Toughened glass touch surface
- Touch with finger, thin glove or stylus
- 23W on - <2W standby
- 0-45°C operating temperature
- 50,000 hour MTBF
- Compatible with Windows 10

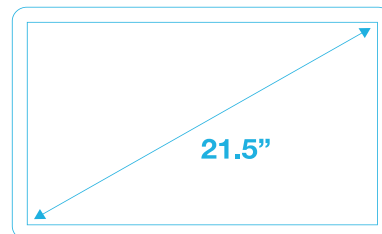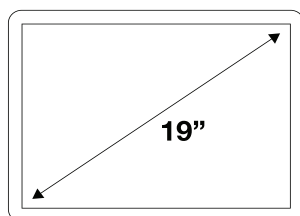

Our open frame touch screens are available in sizes 19" and 21.5" to suit your application.

InTouch Screens

Unit 1, 3 Green Street, Brookvale NSW 2100
1300 557 219

InTouchScreens.com.au | Sales@intouchscreens.com.au

INTOUCH